www.safemag.ru





Wire intercom

Model No. CM-800/801



CM-800



CM-801

COMMAX Co.,Ltd.

- Thank you for purchasing COMMAX products.
- Please carefully read this User's Guide (in particular, precautions for safety) before using a product and follow instructions to use a product exactly.
- The company is not responsible for any safety accidents caused by abnormal operation of the product.

ww.safemag.ru

📦 Contents

1.	Greeting	1
2.	Warnings and Caution	2
З.	Part names and its descriptions	4
4.	Features and Main Functions	5
5.	Wiring	6
6.	Specifications	7


	Instructions for users
Level-B product	The product is registered for electromagnetic compatibility for household use and can be used in all areas including residential areas.

🍟 1. Greetings

- * Thank you for purchasing our Commax product.
- * You should read this user's manual carefully before operating the unit.
- * This common method H/A system provides residents of apartment buildings with safety and convenience based on various built-in functions that protect homes from disasters such as crimes, natural disasters, etc.


2. Warnings and caution

Please follow the things described below in order to prevent any danger or property damage.

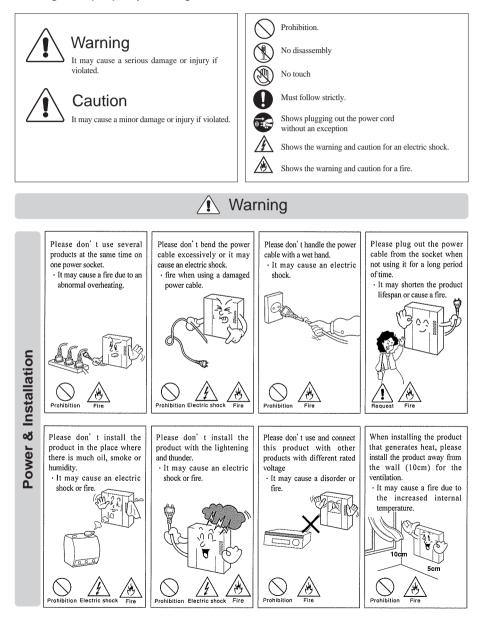



2

www.safemag.ru

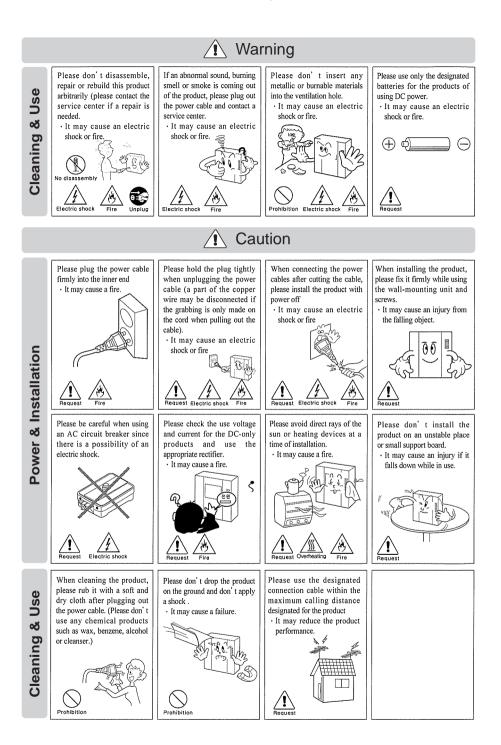

3



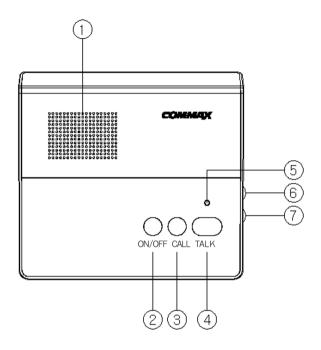


3-1 CM-801 Parts Name

NO	Description
1	Speaker
2	ON/OFF button
3	CALL Button making a call
4	TALK button Keep pressing this button when talking
5	Power Indication Lamp
6	Volume Control Dial
1	Call Sound control Dial

4

www.safemag.ru

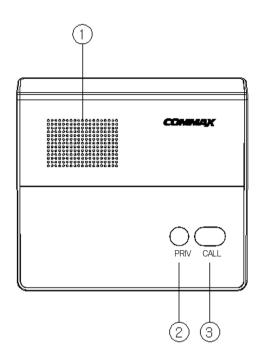

3-2 CM-800 Part Names

NO	Description
1	Speaker
2	Privacy Button
3	CALL Button





4-1 Master Station_CM-801

- 1) After pressing on/off button of CM-801, pushing [call]button will making a call to CM-800.
- When receiving a call from the CM-800, pressing "Talk" button of CM-801 will make a conversation with CM-800 and releasing "Talk" button will hear voice from CM-800.
- 3) When CM-800 makes a call to CM-801, you can hear call sound.
- ** When the conversation is finished, make sure of pressing "ON/OFF" button

4-2 SUB Station_CM-800

- 1) Pressing "Call" button hear call sound from CM-801
- 2) You can talk with CM-801 without any operating.
- Pressing "Privacy" button to stop delivering the voice from CM-800 to CM-801.



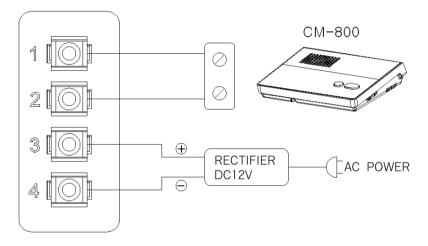

CM-801 terminal of backside

** 12Voltage/1A power supply is recommendable to use for this products5-1 Wiring method

- 1) Terminal 1 : Connecting with CM-800, Non-Polarity, Max. distance 300m
- 2) Terminal 2 : Connecting with CM-800, Non-Polarity. Max.distance 300m
- 3) Terminal 3 : Connecting with Power supply. +
- 4) Terminal 4 : Connecting with Power supply. -

6

6. Specification

Item	Description
Wire	With CM-800 : 2 wires (Talk 2)
Rated Voltage	DC12V/ 200mA
Transmission way	Half-Duplex
Display	N/A
Consumption	Standby: 7mA (In the status of connecting with CM-800)
	Max. : 160mA (In the status of connecting with CM-800)
Distance	Between CM-801 and CM-800 Max. 300m /
	0.65mm- copper wire