

## 2 Megapixel Compact Cube Network Camera

### WCB-200Af Series

HDTV/720p @ 30fps • Wireless Connection




- Most Intelligent, Compact and Affordable 2M Camera
- Intelligent Multi-Profile Sensor Management for Different Environment
- Support 802.11b/g/n Signal Band Wireless Connectivity
- WPS Supported for Easy Wireless Network Setup
- Edge Recording/ Micro SD slot
- Two-way Audio/ PIR/ IR LED/ DDO



ONVIF

### Photo Indication & Dimension Diagram

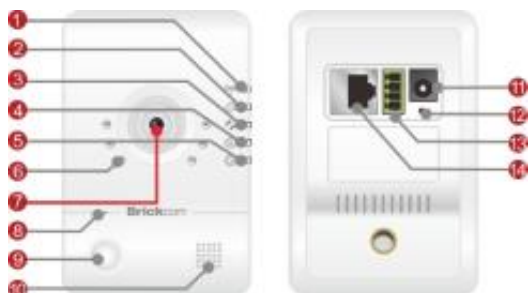

1 RJ-45 Link LED

2 Internet LED

3 WPS LED

4 Power LED

5 Status LED

6 IR LED

7 Fixed Lens

8 Built-in Microphone

9 PIR

10 Built-in Speaker

11 Power Connector



12 Reset Button

13 DI/DO

14 Ethernet RJ45 Socket

15 Micro SD/SDHC/SDXC Slot

16 WPS Button

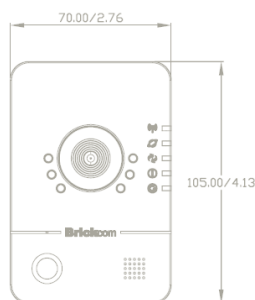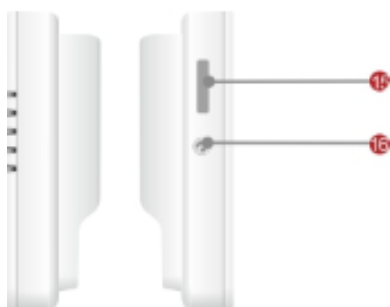

Camera		Video	
<b>Models</b>	<b>WCB-200Af</b>	<b>Video Image Compression</b>	H.264 / MPEG4 / MJPEG
<b>Hardware System</b>	CPU: 533 MHz Flash: 16M RAM: 256M DDR	<b>Video Setting</b>	Audio Exposure Control: Sport/ Normal/ Night Vision/ User Defined Manual Exposure Control: 1//18000~1/5s Manual Gain Control: 1X ~ 15X Manual White Balance Control: 2000K~7000K
<b>Image Sensor</b>	Sensor Type : 1/5" CMOS Sensor Sensor Resolution : 1600x1200 pixel	<b>S/N Ratio</b>	20 dB
<b>Minimum Illumination</b>	0 Lux (IR ON, B/W) 0.065 Lux (IR OFF, B/W) 0.085 Lux(F2.8,Color)	<b>Image Resolution</b>	<b>2M:</b> 1600x1200 @ 15fps <b>1.3M:</b> 1280x1024 @ 26fps <b>1M (HDTV):</b> 1280x720 @ 30fp
<b>IR Illuminators</b>	Built -in IR Illuminators IR LED: 6 pcs IR wavelength: 850nm	<b>General</b>	
<b>Lens</b>	Lens Type: Board Lens Focal Length: f= 2.9 mm Iris: F2.8 View Angle: (H): 55°/ (V): 42°/ (D): 66°	<b>Communication</b>	Ethernet : one 10/100Mbps RJ-45 Supported Protocols : TCP/IP, UDP, ICMP, DHCP, NTP, DNS, DDNS, SMTP, FTP, HTTP, Samba, PPPoE, UPnP, RTP, RTSP, RTCP, IPv6
<b>Audio</b>		<b>Power Input</b>	DC12V/ 1A(Power Supply)
<b>Audio Streaming</b>	2-way Audio Support	<b>Max. Power Consumption</b>	6.2 watts
<b>Audio Compression</b>	G.711, AMR (8 kHz, Mono, PCM)	<b>Environment</b>	Operating Temperature 0°C ~ 50°C (32°F ~122°F), Operating Humidity : 10% ~ 80%
<b>Audio Input/ Output</b>	Built-in MIC & Speaker	<b>Dimension</b>	34.8 (L) X60 (W) X 95 (H) mm
		<b>Weight</b>	129g
		<b>Certification</b>	FCC, CE
		<b>Warranty</b>	Limited 1-year warranty

## Work Best With

### Camera Accessories Options



**CI-803A/CI-803C**  
Camera Bracket



**GL-222**  
Camera Bracket

### Network Equipment Options



**PS-5881**  
8-port 10/100M PoE Fast Ethernet Switch



**BP-1000**  
UPS power pack (Edge Recording)